

?s pn=ep 376667

S1 1 PN=EP 376667

DIALOG(R)File 351:DERWENT WPI
(c) 2000 Derwent Info Ltd. All rts. reserv.

008316017 **Image available**

WPI Acc No: 90-203018/199027

XRPX Acc No: N90-157987

Power supply apparatus for automotive vehicle - comprises normally closed contacts connected across battery and electrical load mounted on vehicle

Patent Assignee: ISUZU MOTORS LTD (ISUZ)

Inventor: KURABAYASHI K; MOROHOSHI H; TSUCHIYA Y; KURABAYASHI K;
MOROBOSHI H

Number of Countries: 003 Number of Patents: 004

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Main IPC	Week
EP 376667	A	19900704	EP 89313559	A	19891222		199027 B
EP 376667	B1	19921202	EP 89313559	A	19891222	F02N-011/08	199249
DE 68903753	E	19930114	DE 603753	A	19891222	F02N-011/08	199303
			EP 89313559	A	19891222		
US 5256956	A	19931026	US 91652485	A	19910208	H02J-007/00	199344
			US 91776882	A	19911017		

Priority Applications (No Type Date): JP 88329846 A 19881227

Cited Patents: 1.Jnl.Ref; A3...9035; NoSR.Pub; SU 1326769

Patent Details:

Patent	Kind	Lan	Pg	Filing Notes	Application	Patent
EP 376667	A		7			

Designated States (Regional): DE GB
EP 376667 B1 E 8

Designated States (Regional): DE GB
DE 68903753 E Based on EP 376667
US 5256956 A 6 Cont of US 91652485

Abstract (Basic): EP 376667 A

The vehicular power supply apparatus comprises a capacitor connected to the battery and a starter switch (23) connected to the battery and in parallel with the capacitor. An energiser delivers electric charge from the capacitor to the engine starter in response to closure of the starter switch. The energiser (22) is a first electromagnetic relay which comprises a coil (22c) having one end connected to the starter switch (23), mains contacts (22a), a first of which is connected to the capacitor and a second of which is connected to the engine starter, and a movable contact (22b) for closing the main contacts by energisation of the coil.

ADVANTAGE - Capable of supplying large amount of current to engine
starter at starting of engine.

Dwg.1/6

Title Terms: POWER; SUPPLY; APPARATUS; AUTOMOTIVE; VEHICLE; COMPRISE;
NORMAL; CLOSE; CONTACT; CONNECT; BATTERY; ELECTRIC; LOAD; MOUNT;
VEHICLE

Derwent Class: Q54; X22

International Patent Class (Main): F02N-011/08; H02J-007/00

International Patent Class (Additional): H02J-007/14

File Segment: EPI; EngPI

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 376 667
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89313559.0

(51) Int. Cl.⁵: H02J 7/14, F02N 11/08

(22) Date of filing: 22.12.89


(30) Priority: 27.12.88 JP 329846/88

(43) Date of publication of application:
04.07.90 Bulletin 90/27(84) Designated Contracting States:
DE GB(71) Applicant: Isuzu Motors Limited
6-22-10 Minamiooi Shinagawa-ku
Tokyo 140(JP)(72) Inventor: Tsuchiya, Yoshinobu
330-4, Shimotsuchidana
Fujisawa-shi Kanagawa(JP)
Inventor: Kurabayashi, Ken
1-1-202, Shimomachiya 3-chome
Chigasaki-shi Kanagawa(JP)
Inventor: Morohoshi, Hiroyoshi
51-20, Sasanodai Asahi-ku
Yokohama-shi Kanagawa(JP)(74) Representative: Brunner, Michael John et al
GILL JENNINGS & EVERY 53-64 Chancery
Lane
London WC2A 1HN(GB)

(54) Power supply apparatus for automotive vehicles.

(57) A power supply apparatus for an automotive vehicle has a large-capacity capacitor (4) charged by a storage battery (1) mounted on the vehicle. When the engine is started, an engine starter (21) is driven by electric charge stored in the capacitor.

Fig. 1

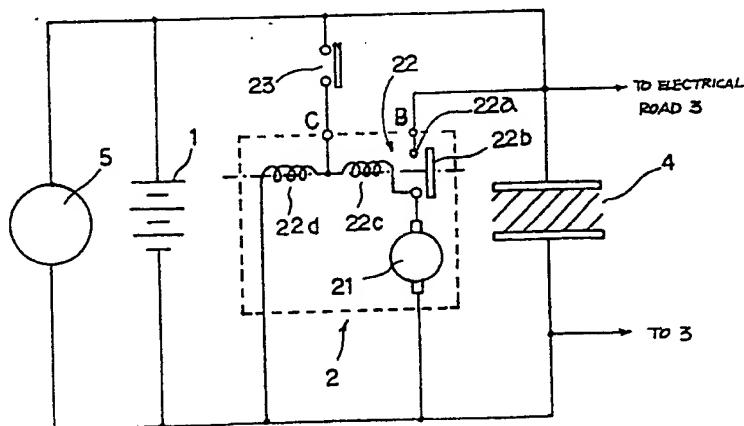

Xerox Copy Centre

EP 0 376 667 A2

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 376 667
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89313559.0

(51) Int. Cl.5: H02J 7/14, F02N 11/08

(22) Date of filing: 22.12.89


(30) Priority: 27.12.88 JP 329846/88

(43) Date of publication of application:
04.07.90 Bulletin 90/27(84) Designated Contracting States:
DE GB(71) Applicant: Isuzu Motors Limited
6-22-10 Minamiooi Shinagawa-ku
Tokyo 140(JP)(72) Inventor: Tsuchiya, Yoshinobu
330-4, Shimotsuchidana
Fujisawa-shi Kanagawa(JP)
Inventor: Kurabayashi, Ken
1-1-202, Shimomachiya 3-chome
Chigasaki-shi Kanagawa(JP)
Inventor: Morohoshi, Hiroyoshi
51-20, Sasanodai Asahi-ku
Yokohama-shi Kanagawa(JP)(74) Representative: Brunner, Michael John et al
GILL JENNINGS & EVERY 53-64 Chancery
Lane
London WC2A 1HN(GB)

(54) Power supply apparatus for automotive vehicles.

(57) A power supply apparatus for an automotive vehicle has a large-capacity capacitor (4) charged by a storage battery (1) mounted on the vehicle. When the engine is started, an engine starter (21) is driven by electric charge stored in the capacitor.

Fig. 1

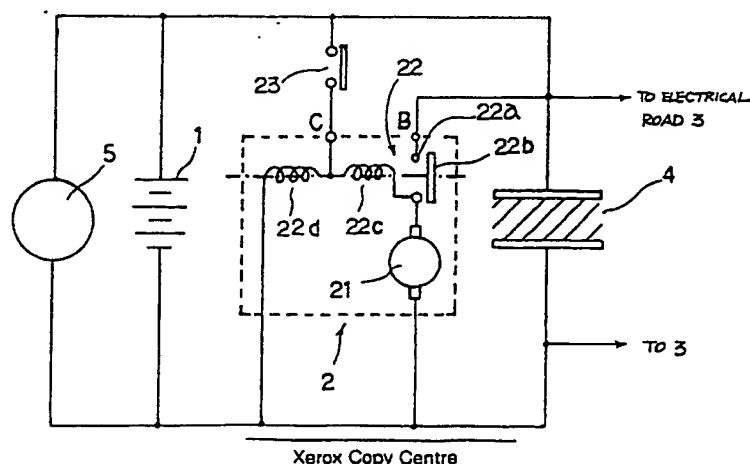

Xerox Copy Centre

EP 0 376 667 A2

POWER SUPPLY APPARATUS FOR AUTOMOTIVE VEHICLES

This invention relates to a vehicular power supply apparatus mounted on an automotive vehicle to serve as the power supply of an engine starter when the engine is started.

A lead storage battery is mounted on an automotive vehicle to serve as the power supply of the engine starter and other electrical loads such as the auxiliary equipment of the vehicle. When the engine is started, the lead storage battery supplies the starter with a large current on the order of, say, 100 ~ 200 A for a short period of time. The engine crankshaft is rotated by the starter torque produced by the resulting power, thereby starting the engine.

While the vehicle is traveling, the lead storage battery is charged by the power from a generator mounted on the vehicle and driven by the engine. The battery is thus charged to make up for the large amount of power consumed at engine start.

In a well-known rechargeable lead storage battery, which is a secondary battery, charging and discharging take place owing to the chemical action of an electrolyte and electrodes. Consequently, at discharge, a large amount of current is capable of discharge in a short period of time, as indicated by the discharge characteristic of Fig. 6(a). At charging, however, a current of less than 10 A is supplied over a long period of time to achieve charging, as indicated by the example of Fig. 6(b). If a large amount of current were to be supplied, heating and electrode deformation would result.

Accordingly, in vehicles whose users drive only short distances and for short periods of time (as for ordinary commuting), and in vehicles whose users make a large number of starts and stops (as for making deliveries), actual driving time is short while the number of times the engine is started is large. As a result, the electrical power expended by battery discharge at starting cannot be compensated for by sufficient charging, and hence there is the danger that the battery will die, thus making it impossible to start the engine.

A power supply apparatus for automobiles disclosed in the specification of Japanese Utility Model Application Laid-Open (KOKAI) No. 56-146644 includes a series circuit composed of an engine starter and a starter switch, and a series circuit composed of a unidirectional element and a capacitor. The two series circuits are connected in parallel to a DC power source, both ends of the capacitor are connected to a load, and power is supplied to the load.

In this proposed power supply apparatus for automobiles set forth in the above publication, the power supply circuit employs a large-capacity capacitor comprising an electrical double layer ca-

pacitor.

However, since this large-capacity capacitor is for the load, it is isolated from the starter circuit by a diode at engine start and therefore is not intended to constitute part of the engine starting power supply.

In studies regarding the designing of batteries for mounting on automotive vehicles, most emphasis has been placed on engine startability as a deciding factor of battery capacity. Accordingly, the battery mounted on an automotive vehicle is required to be high in weight and capacity in consideration of the power consumed at starting of the engine, which demands a large amount of power. On the other hand, since the battery is supplied with power after engine start by the generator mounted on the vehicle and driven by the engine, a battery of small capacity is sufficient.

In the drawings:-

An object of the present invention is to provide a vehicular power supply apparatus capable of supplying a large amount of current to an engine starter at starting of an engine.

Another object of the present invention is to provide a vehicular power supply apparatus capable of driving an engine starter easily even if the capacity of the battery mounted on the vehicle is reduced.

In accordance with the present invention, there is provided a vehicular power supply apparatus for driving an engine starter by electrical power from a battery mounted on an automotive vehicle, comprising a large-capacity capacitor connected to the battery, a starter switch connected to the battery and in parallel with the capacitor, and energizing means for delivering electric charge from the capacitor to the engine starter in response to closure of the starter switch.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

Fig. 1 is a circuit diagram illustrating an embodiment of a vehicular power supply apparatus according to the present invention;

Fig. 2 is a graph showing the relationship between starter current and time at starting of an engine;

Fig. 3 is a capacitor discharge characteristic diagram;

Fig. 4 is a circuit diagram illustrating another embodiment of a vehicular power supply apparatus according to the present invention;

Fig. 5 is diagram showing the charging characteristic of a large-capacity capacitor; and

Fig. 6 is a diagram showing an example of charging and discharge characteristics of a lead storage battery.

Embodiments of the present invention will now be described in detail with reference to the drawings.

Fig. 1 is a circuit diagram illustrating the construction of an embodiment of the invention.

A battery 1 shown in Fig. 1 is a lead storage battery mounted on an automotive vehicle and serving as the power supply of a starter unit 2, which starts the engine of the vehicle, and an electrical load of the vehicle.

The starter unit 2 has a motor 21 engaged with the engine for rotating a crankshaft at engine start, and an electromagnetic relay 22 having main contacts 22a and a movable contact 22b. The arrangement is such that the movable contact 22b which closes the circuit by contacting the main contacts 22a is driven by the electromagnetic attracting force of two types of coils, namely an A coil 22c and a B coil 22d. The terminal on the voltage side of the motor 21 is connected to one of the main contacts 22a and to one end of the A coil 22c, the other end of the A coil 22c is connected to one end of the B coil 22d and to a C terminal of the starter unit 2, and the other main contact 22a is connected to a B terminal of the starter unit 2. The ground terminal of the motor 21 and the other end of the B coil 22d are grounded to the vehicle body. Numeral 23 denotes a starter switch connected across a + terminal of the battery 1 and the C terminal of the starter unit 2. By closing the starter switch 23 when the engine is started, the starter unit 2 is actuated so that the engine is started by driving power from the motor 21.

Numeral 4 denotes a capacitor having a large capacity. Employed as this capacitor is one having the size of an electrical double layer capacitor used in the back-up power supply of the memory of an electronic device. For example, the capacitor might have a static electric capacitance on the order of 10 ~ 150F. The + terminal of the capacitor 4 is connected to the B terminal of the starter unit 2, namely the + terminal side of the battery 1, and the - terminal of the capacitor 4 is grounded. Thus the capacitor 4 is sufficiently charged at all times by the battery 1.

Numeral 5 denotes a well-known generator driven by the engine. The generated power is converted into direct current, which charges the battery 1.

The operation of the embodiment constructed as set forth above will now be described.

When the starter switch 23 is closed at starting of the engine, the current from the battery 1 flows

from the A coil 22c of the electromagnetic relay 22 to the motor 21 via the C terminal of the starter unit 2, and from the C terminal to the B coil 22d, whereby the movable contact 22b is attracted by the electromagnetic attracting force of the two coils to close the main contacts 22a.

Consequently, the charge in the large-capacity capacitor 4 sufficiently charged thus far by the battery 1 and the current from the battery 1 flow into the motor 21. These two large currents start the motor 21, which applies a strong driving force to the engaged crankshaft to start the engine. The large current for starting the motor at this time lasts for about 0.5 sec, as shown in the example of Fig. 2. If, by way of example, the amount of charge stored in the battery 1 should diminish to the extent that starting of the engine would be impossible with the current from the battery, the large current resulting from the charge in the large-capacity capacitor will still drive the motor 21 strongly enough to achieve engine start.

As for the capacity of the capacitor 4, ordinarily the starter current required when starting a gasoline engine having a displacement of 1.5 l is on the order of 100 ~ 200 A, and the time needed to start the engine is several seconds at most. Accordingly, the capacity of the capacitor need have a value that satisfies these requirements.

Fig. 3 shows an example of the discharging characteristic of a capacitor. The discharge equation of an ordinary capacitor is as expressed by the following equation:

$$I = \frac{E}{R} = \frac{E_0}{R} \exp\left(\frac{t}{RC}\right) \quad (1)$$

where

E₀: capacitor charging voltage

R: load resistance

C: capacitor capacity

The load resistance R is about 0.05 Ω for a vehicle running on gasoline. A discharge time of several seconds will suffice, as set forth above. Therefore, if $R \cdot C = 5 \sim 7$ (sec), then $C \approx 100 \sim 150$ (F).

Thus, the calculations are based on a case where the charge in the capacitor is discharged in several seconds when the starter is actuated. Since a large current is required for 0.5 sec, $R \cdot C = 0.5$ (sec) will hold if the load of the capacitor is limited to this period of time. Therefore, $C \approx 10$ (F) will suffice.

In accordance with the present embodiment as set forth above, a large-capacity capacitor capable of storing a large amount of electric charge is attached as part of the power supply of a vehicle. Therefore, even if the amount of charge in a battery is constantly small because it is used in a vehicle whose user drives only short distances and for short periods of time or in a vehicle whose user makes a large number of starts and stops, the starter can be driven by the charge in the large-

capacity capacitor at start-up, thus making it possible to start the engine.

By way of example, Fig. 5 illustrates data obtained when a capacitor having a capacitance of about 150F is charged by a battery discharged to 95% of its total charge. It will be appreciated that charging of the capacitor is completed in approximately 20 sec, as a result of which starting of the engine can be accomplished sufficiently.

Further, in accordance with the invention, providing the large-capacity capacitor reduces dependence upon the amount of charge in the battery when the engine is started. When a vehicle is being designed, therefore, the capacity of the battery with which the vehicle is to be provided can be made smaller than would be the case with the prior art.

For example, in the case of a passenger car fueled by gasoline, the capacity of the battery used ordinarily is 25 ~ 30 AH. If the present invention is applied, however, a capacity of 10 AH will suffice. The following is an example of the dimensions and weight of the battery and capacitor:

Dimensions of 27 AH battery: 227 x 127 x 187 mm

Weight: 9.5 kg

Dimensions of 10 AH battery: 147 x 92 x 138 mm

Weight: 4.5 kg

Dimensions of 150F/16 V capacitor: 120 x 120 x 140 mm

Weight: 5.5 kg

Dimensions of 10F/16 V capacitor: 60 x 60 x 40 mm

Weight: 0.65 kg

Fig. 4 is a circuit diagram illustrating the construction of another embodiment of the present invention, in which portions similar to those shown in Fig. 1 are designated by like reference characters and need not be described again.

In Fig. 4, numeral 6 denotes a relay connected across the + terminal of battery 1 and a + circuit on the side of the vehicle. Contacts 61 of the relay 6 are normally closed to connect the + terminal of the battery 1 to the + circuit on the vehicle side. The relay 6 has a coil 62 which, by being energized, causes the contacts 61 to open. The coil 62 is connected across the C terminal of the starter unit 2 and ground.

With the embodiment thus constructed as shown in Fig. 4, closing the starter switch 23 actuates the starter unit 2 so that the motor 21 is driven by the charge accumulated in the large-capacity capacitor 4, just as in the first embodiment. By closing the starter switch 2, however, the relay 6 is opened so that the + terminal of the battery 1 is disconnected from the + circuit on the vehicle side, thereby protecting against consumption of charge accumulated in the battery 1. Furthermore, even though power is not supplied to the

+ circuit on the vehicle side from the battery 1 due to opening of the relay 6, the coil 62 of the relay 6 and the B coil 22d of the electromagnetic relay 22 are supplied with current from the large-capacity capacitor 4, as a result of which the attracting action of both coils is maintained.

Claims

1. A vehicular power supply apparatus for driving an engine starter (21) by electrical power from a battery (1) mounted on an automotive vehicle, comprising:

a capacitor (4) connected to the battery;
a starter switch (23) connected to the battery and in parallel with the capacitor; and
energising means (22) for delivering electric charge from the capacitor to the engine starter in response to closure of the starter switch.

2. Apparatus according to claim 1, wherein the energising means (22) is a first electromagnetic relay which comprises a coil (22c) having one end connected to the starter switch (23), main contacts (22a), a first of which is connected to the capacitor and a second of which is connected to the engine starter, and a movable contact (22b) for closing the main contacts by energisation of the coil.

3. Apparatus according to claim 2, wherein the other end of the coil (22c) is connected to the second of the main contacts (22a).

4. Apparatus according to claim 2 or claim 3, further comprising normally closed contacts (61) connected across the battery and an electrical load (3) mounted on the vehicle, and a second electromagnetic relay (6) connected to the first electromagnetic relay for opening the normally closed contacts when energised.

5. Apparatus according to claim 1, wherein the capacitor is a large-capacity electrical double layer capacitor.

Fig. 1

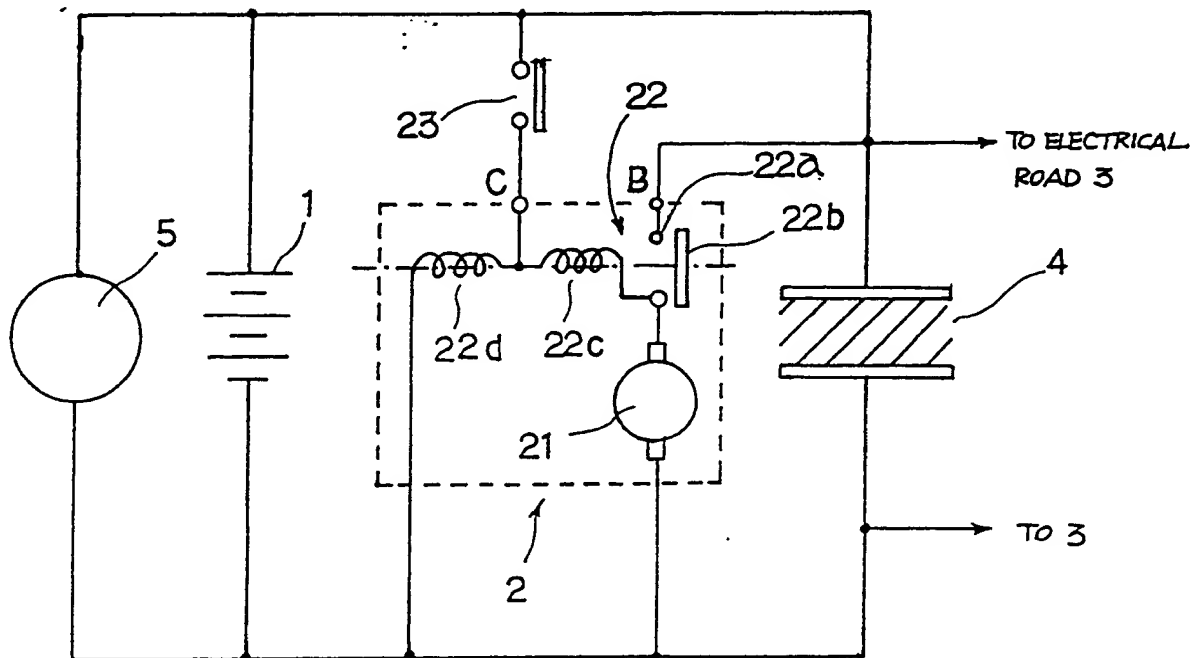


Fig. 4

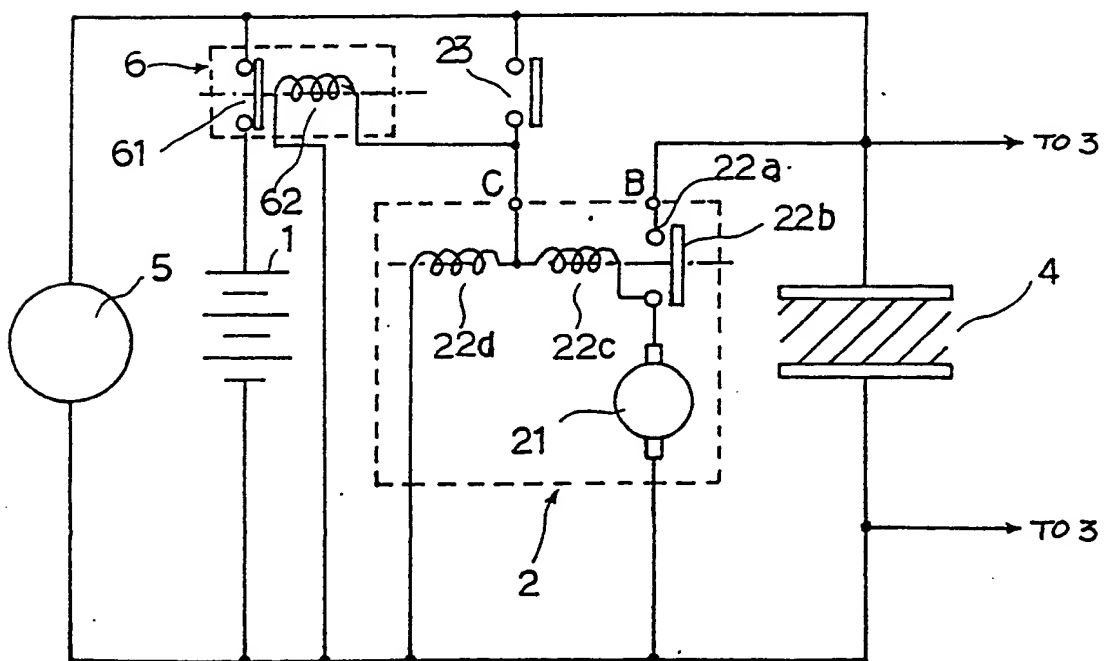


Fig. 2

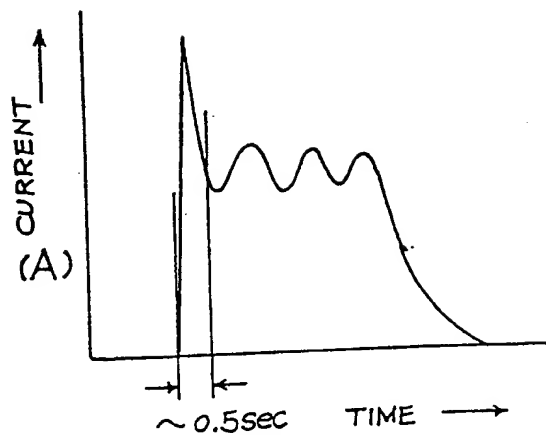


Fig. 3

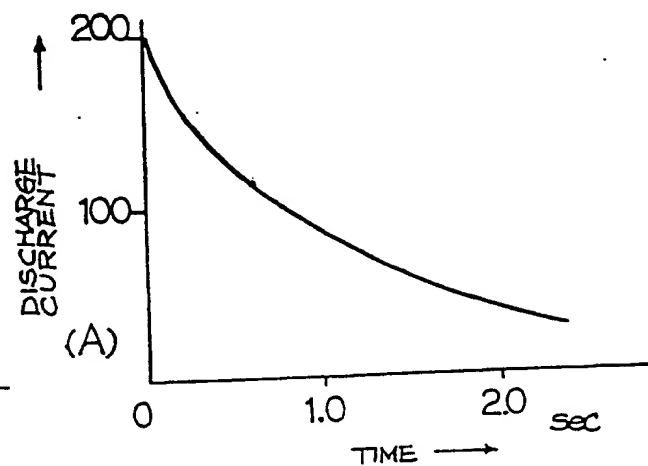


Fig. 5



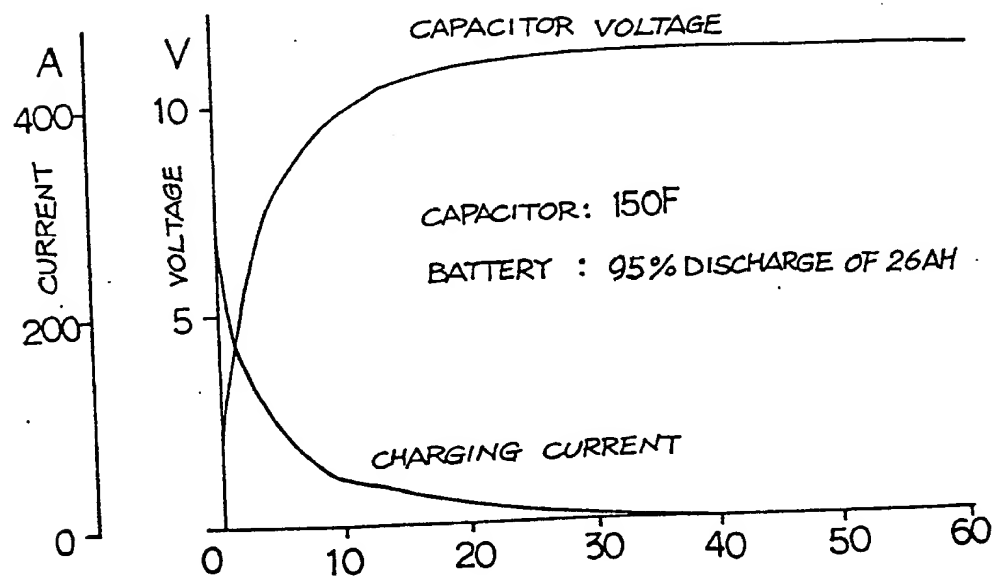


Fig. 6

(a)

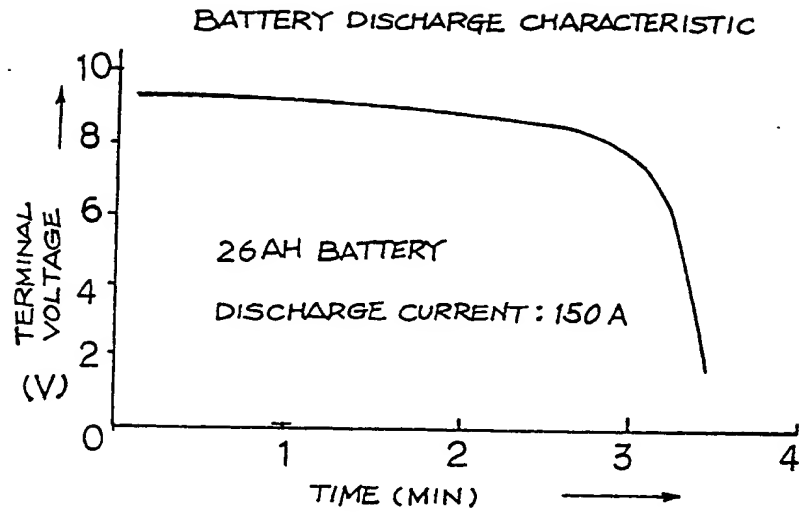

(b)

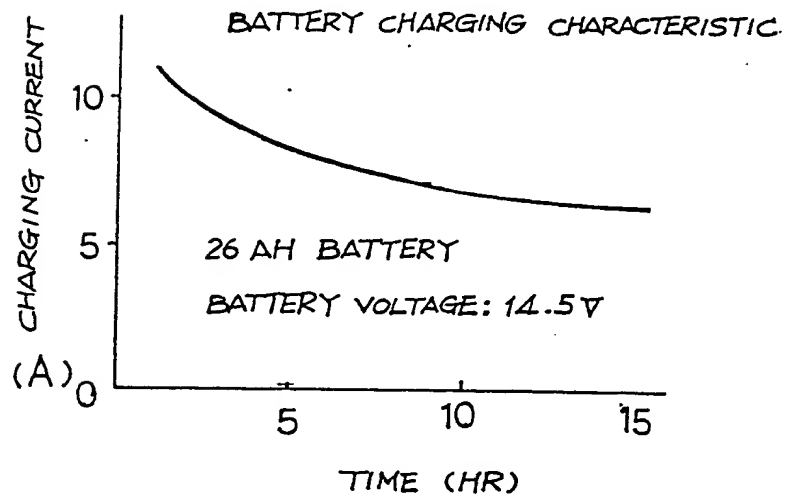

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 376 667
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89313559.0

(51) Int. Cl.⁵: H02J 7/14, F02N 11/08

(22) Date of filing: 22.12.89

(30) Priority: 27.12.88 JP 329846/88


(43) Date of publication of application:
04.07.90 Bulletin 90/27(84) Designated Contracting States:
DE GB(69) Date of deferred publication of the search report:
29.08.90 Bulletin 90/35(71) Applicant: Isuzu Motors Limited
6-22-10 Minamiooi Shinagawa-ku
Tokyo 140(JP)(72) Inventor: Tsuchiya, Yoshinobu
330-4, Shimotsuchidana
Fujisawa-shi Kanagawa(JP)
Inventor: Kurabayashi, Ken
1-1-202, Shimomachiya 3-chome
Chigasaki-shi Kanagawa(JP)
Inventor: Morohoshi, Hiroyoshi
51-20, Sasanodai Asahi-ku
Yokohama-shi Kanagawa(JP)(74) Representative: Brunner, Michael John et al
GILL JENNINGS & EVERY 53-64 Chancery
Lane
London WC2A 1HN(GB)

(54) Power supply apparatus for automotive vehicles.

(57) A power supply apparatus for an automotive vehicle has a large-capacity capacitor (4) charged by a storage battery (1) mounted on the vehicle. When

the engine is started, an engine starter (21) is driven by electric charge stored in the capacitor.

Fig. 1

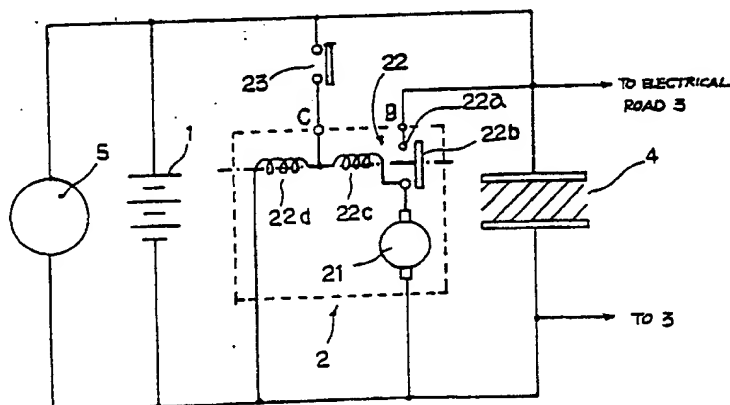

Xerox Copy Centre

EP 0 376 667 A3



EP 89 31 3559

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	SOVIET INVENTIONS ILLUSTRATED DERWENT LONDON GB WEEK 8809, 3 MARCH 1988 & SU-A-1326769 (SOKOLOV) *abstract*	1	F02N11/08
A	-----	2.	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			F02N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21 JUNE 1990	Examiner BIJN E.A.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 150 03.82 (P0401)